

NAILFIN INSTALLATION

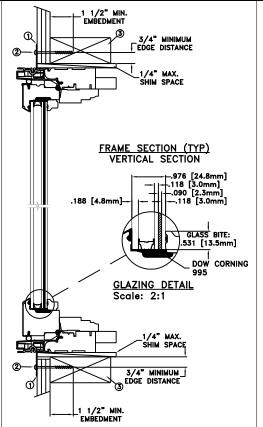

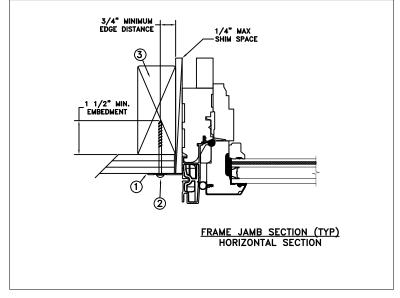

MAXIMUM FRAME	DP	IMPACT				
60 x 72	+60/-65	YES				
WINDZONI	WINDZONE 3					

Installation Notes:

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).

TYPICAL ELEVATION WITH FASTENER SPACING

16" O.C.

4" FROM CORNERS

16" O.C. TYP


- 2. Use #8 PH or greater fastener through the nailing flange with sufficient length to penetrate a minimum of 1 1/2" into the wood framing. For 2x wood frame substrate (min. S.G. = 0.42)
- Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads
 to the structure. The host structure is the responsibility of the architect or engineer of record for the
 project of installation.

General Notes:

- The product shown herein is designed, tested and manufactured to comply with the wind load criteria
 of the adopted International Building Code (IBC), the International Residential Code (IRC), the Texas
 Revisions and the industry requirement for the stated conditions.
- All glazing shall conform to ASTM E1300.
- At minimum, glazing is 4.8mm annealed 11.7mm airspace 3.0mm annealed 2.3mm SGP Interlayer by Kuraray - 3.0mm annealed insulating glass.
- 4. Use structural or composite shims where required.

This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to www.jeld-wen.com.


DISCLAIMER:




	12/0	06/2018	TET	.PWF.	T 37	'37 LAK	EPORT BLVD LS OR, 97601		
DRAWN BY: J.HAWKINS	SCALE:	NTS	للندل ا	TE AA CI	RLAMA PHC	TH FAL NE: (8	.LS OR, 97601 300) 535-3936		
CHECKED BY: K.CAMPBELL	TITLE:	<u> </u>			\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\				
APPROVED BY: D.STOKES		Custom	n Clad Casement Stationary Window - Impact						
D009288									
REPORT No: NCTL-310-18-01	.8 / NC	TL-310-1	8-017	CAD DWG. No.: CustCLCsmtSta Cert	REV: A	SHEET	1 of 5		

16" O.C. 4" FROM CORNERS 16" O.C. TYP.

TYPICAL ELEVATION WITH FASTENER SPACING

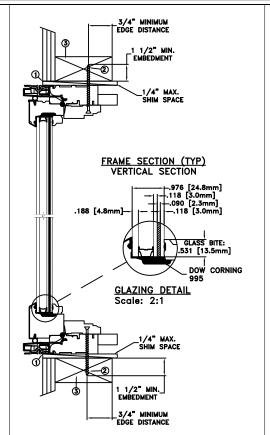

THROUGH FRAME INSTALLATION

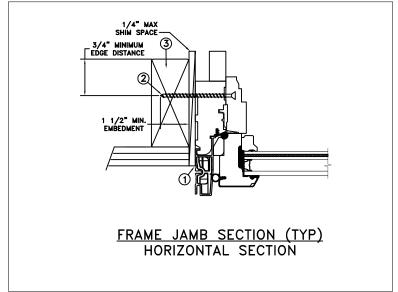

MAXIMUM FRAME	DP	IMPACT					
60 x 72	+60/-65	YES					
WINDZONI	WINDZONE 3						

Installation Notes:


- 1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
- 2. Use #8 PH or greater fastener through the head & side jambs with sufficient length to penetrate a minimum of 1 1/2" into the wood framing. For 2x wood frame substrate (min. S.G. = 0.42)
- Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

General Notes:

- The product shown herein is designed, tested and manufactured to comply with the wind load criteria
 of the adopted International Building Code (IBC), the International Residential Code (IRC), the Texas
 Revisions and the industry requirement for the stated conditions.
- All glazing shall conform to ASTM E1300.
- At minimum, glazing is 4.8mm annealed 11.7mm airspace 3.0mm annealed 2.3mm SGP Interlayer by Kuraray - 3.0mm annealed insulating glass.
- Use structural or composite shims where required.

This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to www.jeld-wen.com.


DISCLAIMER:




	DATE: 12/0	06/2018	Tet	DWEN	37.	37 LAK	EPORT BLVD.	
DRAWN BY: J.HAWKINS	SCALE:	NTS	لمنال	TA AA BTI			300) 535-3936	
CHECKED BY: K.CAMPBELL	TITLE:	<u> </u>			\A.C.			
APPROVED BY: D.STOKES		Custom	n Clad Casement Stationary Window - Impact					
D009288								
REPORT No: NCTL-310-18-01	.8 / NC	TL-310-1	8-017	CAD DWG. No.: CustCLCsmtSta Cert	REV:	SHEET	2 of 5	

16" O.C. 4" FROM CORNERS 16" O.C. TYP.

TYPICAL ELEVATION WITH FASTENER SPACING

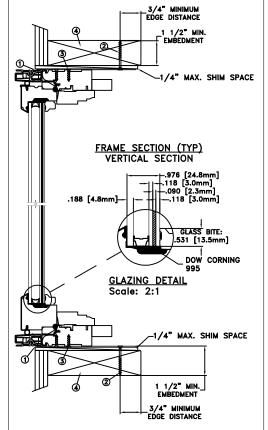

MASONRY STRAP INSTALLATION

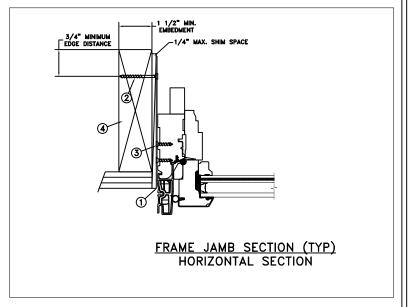

MAXIMUM FRAME	DP	IMPACT			
60 x 72	+60/-65	YES			
WINDZONE 3					

Installation Notes:


- Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
- 2. Use 2 #8 PFH or larger fasteners through masonry strap with sufficient length to penetrate a minimum of 1 1/2" into the buck. For 2x wood frame substrate (min. S.G. = 0.42).
- 3. Use 2 #8 PFH or larger fasteners through masonry strap into jamb without penetrating through the jamb into product causing visability or collateral damage to product.
- 4. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

General Notes:

- The product shown herein is designed, tested and manufactured to comply with the wind load criteria
 of the adopted International Building Code (IBC), the International Residential Code (IRC), the Texas
 Revisions and the industry requirement for the stated conditions.
- All glazing shall conform to ASTM E1300.
- At minimum, glazing is 4.8mm annealed 11.7mm airspace 3.0mm annealed 2.3mm SGP Interlayer by Kuraray - 3.0mm annealed insulating glass.
- Use structural or composite shims where required.


This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to www.jeld-wen.com.

DISCLAIMER:




	12/0	06/2018	TET	DWE	T 37	37 LAK	EPORT BLV
DRAWN BY: J.HAWKINS	SCALE:	NTS	المال	LL VV C.I			LS OR, 9760 300) 535-393
CHECKED BY: K.CAMPBELL	TITLE:	<u> </u>			\\ <i>I</i> ''		
APPROVED BY: D.STOKES		Custom	Clad Cas	ement Stationar	y Windov	v - Im	npact
D009288							
REPORT No: NCTI -310-18-01	8 / NC	TI -310-1	8 - 017	CAD DWG. No.: CustCl CsmtSta Cert	REV: A	SHEET	3 of 5

TYPICAL ELEVATION WITH FASTENER SPACING

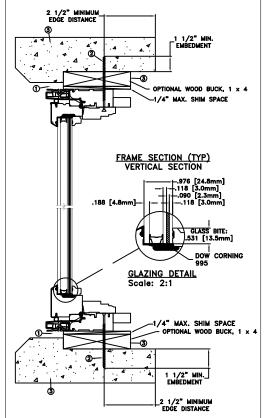

CONCRETE/MASONRY INSTALLATION

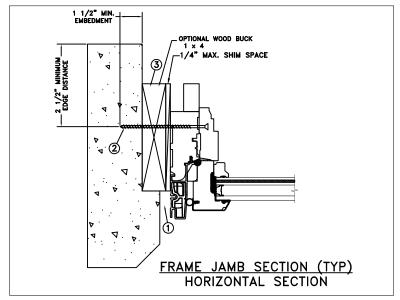

MAXIMUM FRAME	DP	IMPACT					
60 x 72	+60/-65	YES					
WINDZONE	WINDZONE 3						

Installation Notes:


- 1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
- 2. Use 3/16" tapcon or equivalent fasteners through frame with sufficient length to penetrate a minimum of 1 1/2" into concrete or masonry at each location with a 2 1/2" min. from edge distance. For concrete (min. fc = 3000 psi) or masonry substrate (CMU shall adhere to ASTM C90).
- Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

General Notes:

- The product shown herein is designed, tested and manufactured to comply with the wind load criteria
 of the adopted International Building Code (IBC), the International Residential Code (IRC), the Texas
 Revisions and the industry requirement for the stated conditions.
- All glazing shall conform to ASTM E1300.
- At minimum, glazing is 4.8mm annealed 11.7mm airspace 3.0mm annealed 2.3mm SGP Interlayer by Kuraray - 3.0mm annealed insulating glass.
- Use structural or composite shims where required.


This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to www.jeld-wen.com.

DISCLAIMER:

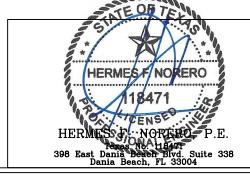


	12/0	06/2018	TET	DWEN	T 37	'37 LAK	EPORT BLVD.		
DRAWN BY: J.HAWKINS	SCALE:	NTS	المال ا	TE AA CI			LS OR, 97601 300) 535-3936		
CHECKED BY: K.CAMPBELL	TITLE:	<u> </u>		1 Cl 1'					
APPROVED BY: D.STOKES		Custom	n Clad Casement Stationary Window - Impact						
D009288									
REPORT No: NCTL-310-18-01	.8 / NC	TL-310-1	8-017	CAD DWG. No.: CustCLCsmtSta Cert	REV: A	SHEET	4 of 5		

16" O.C. 4" FROM TYP. CORNERS 16" O.C. TYP. TYPICAL ELEVATION WITH FASTENER SPACING

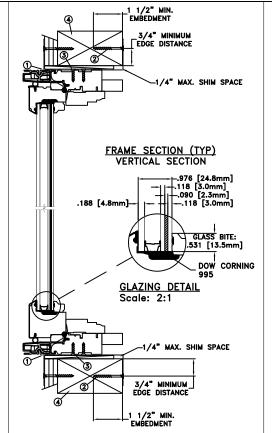

MASONRY STRAP INSTALLATION

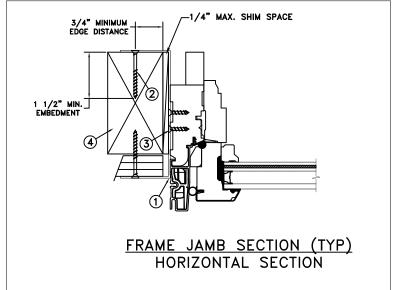

MAXIMUM FRAME	DP	IMPACT				
60 x 72	+60/-65	YES				
WINDZONE 3						

Installation Notes:

- Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
- Use min. 2 #8 PFH or larger fasteners through masonry strap with sufficient length to penetrate a minimum of 1 1/2" into the buck. Bend straps around both sides of the buck. For 2x wood frame substrate (min. S.G. = 0.42).
- Use min. 2 #8 PFH or larger fasteners through masonry strap into jamb without penetrating through the jamb into product causing visability or collateral damage to product.
- Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

General Notes:


D009288

- The product shown herein is designed tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the Texas Revisions and the industry requirement for the stated conditions.
- All glazing shall conform to ASTM E1300.
- At minimum, glazing is 4.8mm annealed 11.7mm airspace 3.0mm annealed 2.3mm SGP Interlayer by Kuraray - 3.0mm annealed insulating glass.
- Use structural or composite shims where required.

This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to www.ield-wen.com.

DISCLAIMER:

This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.



	DATE: 12/06/2018		TE
DRAWN BY: J. HAWKINS	SCALE:	NTS	عدل ا
CHECKED BY: K.CAMPBELL	TITLE:		
APPROVED BY: D.STOKES		Custom	Clad C

LPWEN KLAMATH FALLS OR, 97601

3737 LAKEPORT BLVD. PHONE: (800) 535-3936

Casement Stationary Window - Impact

REPORT NO: NCTL-310-18-018 / NCTL-310-18-017

CAD DWG. No.: CustCLCsmtSta Cert

5 of 5